
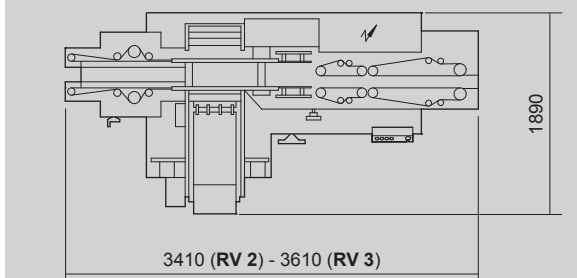
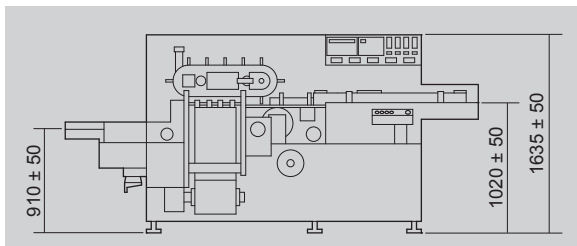
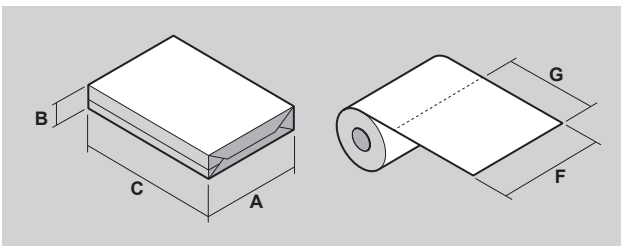


This publication supersedes and replaces any previous edition and revision. All rights reserved.
 No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form
 or by any means, electronic, mechanical, photocopying, recording or otherwise, without permission
 of Tecnicam s.r.l. (Bologna - Italy).
 The technical data are not binding and may be subject to change without prior notice.


RV

High speed continuous motion overwrapper with belt sealing

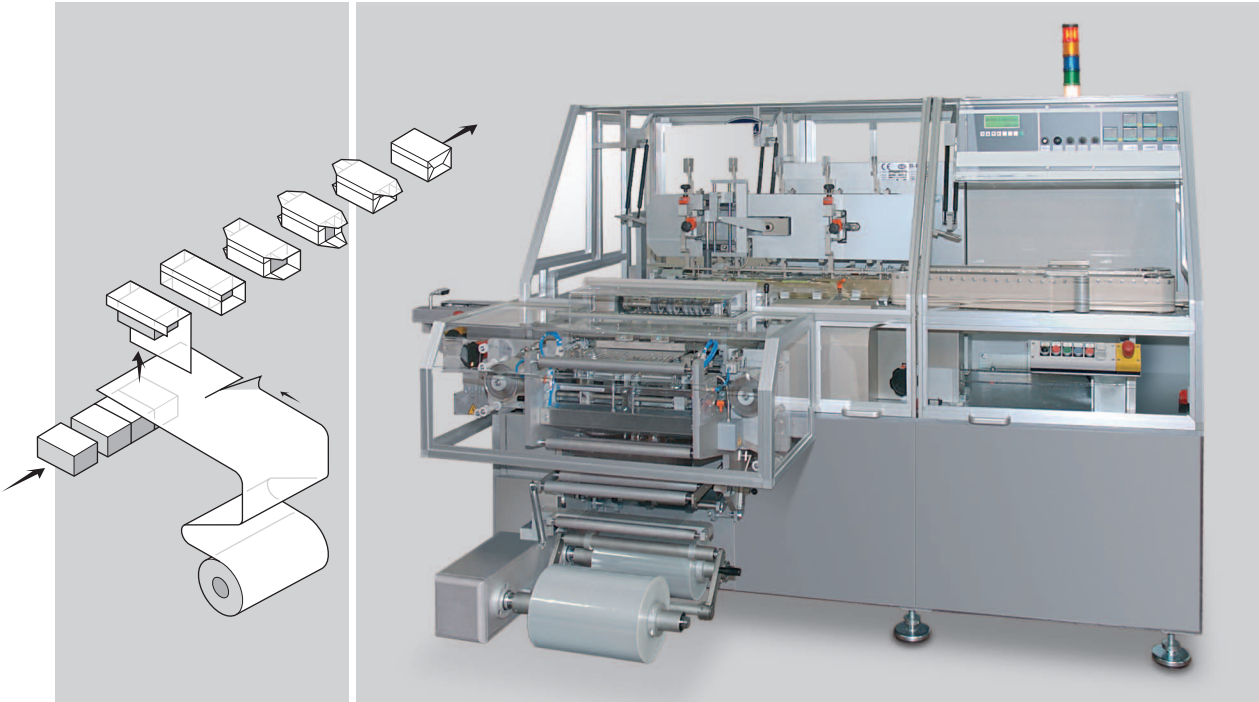

TECHNICAL DATA		RV 2	RV 3
Mechanical speed	STROKES/1'	max. 230	max. 150
Power absorption (max.)	KW	6	6
Air consumption	NI/1'	50	50
Air pressure	bar	6	6
Gross weight	kg	~2250	~2400
Net weight	kg	~1900	~2000

Size range	RV 2	min.	max.	RV 3	min.	max.
A		40	110		60	190
B		10	50		50	85
C		60	200		90	220
F		90	335		130	580
G		80	280		140	330

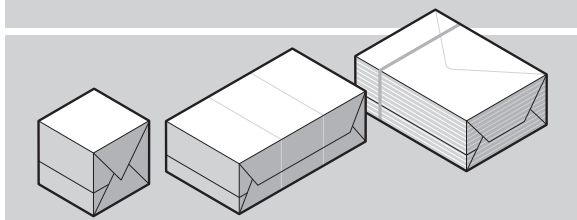

FM-RV-02-uk (10/11/2014)